


Technical details carpet tiles

Manufacturing type	Herstellungsart	Mode fabrication	Productie methode			tufted 1/10"
Construction	Struktur	Structure	Structuur			3-ply cut pile
Pile composition	Polmateriaal	Couche d'usure	Pool Samenstelling			100% PA heatset - Econyl®
Dye method	Farbgestaltung	Coloration	Kleurverwerking			solution dyed
Primary backing	Trägermaterial	Premier dossier	Tuftdoek			polyester fleece
Secondary backing	Rückenausrüstung	Dossier	Rug			GREENBASE modified bitumen
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m ²	1.300 (+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m ²	4.800 (+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm	5,5 (+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm	8,0 (+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m ²	189.000 (+/-)
Size	Abmessung	Dimension	Afmeting		cm	50 x 50
Packing	Verpackung	Emballage	Verpakking			12 per box 3 m²
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307		33 heavy commercial
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307		LC 4
Castor chair	Stuhlleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985		A intensive
Dimensional stability	Dimensionstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986		≤ 0,2%
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1		Bfl-S1 loose laid
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV	≤ 2,0
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω	≤ 10⁹
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmte doorlaatweerstand	ISO 8302	m ² /K/W	0,073
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α _w	0,25
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL _w	29 dB
						ISO 10140
Colour fastness light	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105 B02		≥ 7
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijftechtheid	ISO 105 X12		≥ 5

Scan the QR code and discover the collection.

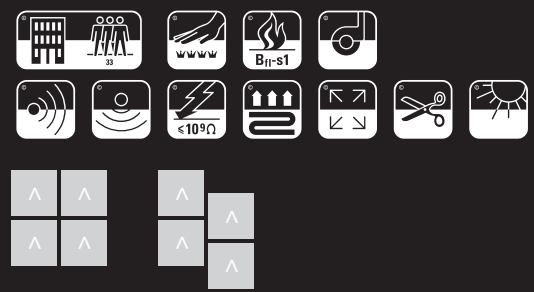

EN1307
for use as floorcovering
in buildings (EN 14041)
according to the
manufacturer's specification

CE
16
EN 14041
DOP 000533T-001



These technical details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request, if available. We reserve the right to alter specifications without notice. Due to the method of manufacture, perfect pattern/colour matching cannot be guaranteed. Shading/pile reversal might occur in cut pile carpets, without affecting overall quality and suitability. It is not considered as a manufacturing fault.